



AZURE
EV BUS - 12M BUS

100% ELECTRIC BUS

EXTERIOR




Up-To Date Exterior Design with **Latest Accessory Features**

INTERIOR



Advance Driving Control System and Built-In Intelligence Transportation System (ITS) Advance On-Live Security System

DIMENSION

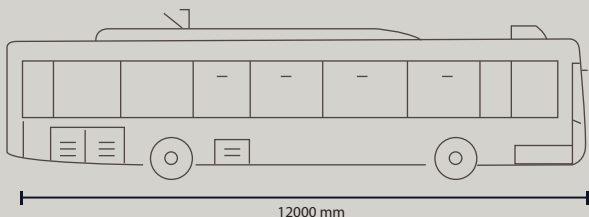

SYSTEM



TECHNICAL SPECIFICATION

SPECIFICATION

Seat number	42 seated / 30 standing (total : 51 passengers*)
Overall dimensions (mm)	12000 x 2500 x 3350
Wheelbase (mm)	5900
Gross Weight (kg)	18000
Max. speed (km/h)	70
Turning radius (mm)	12
Curb Weight (kg)	13000

*depends on selected optional features & wheelchair area utilization

STANDARD CHASSIS

Motor	DANA TM4 Electric Driving Motor MD130. Max. Power 200KW, Max. Torque 3100Nm
Electric control system	Higer pure electric control system
Battery	CATL LiFe PO4 power battery 385kwh
Suspension	Front 2 rear 4 air suspension
Steering	Power Steering
Axle	Disc in front/disc in rear
Braking	WABCO ABS, front and rear disc brake
Tire	275/70R22.5 tubeless tire, without spare tire
Driving range	up to 400km (with carrying 42 seated passengers)
Chassis type	RHD, Low Entrance
AC	HIGER Electric air conditioner
Painting	Painting Design Solid paint for whole body
Door	Front single and middle double pneumatic inner-swing passenger door, driver door
Seats	Passenger seats with PVC cover
Window	Sealed side window, white color
Audio Visual	AM/FM, Hard disc player, 2x17" LCD TV
Rear-view mirror	Luxury electrical rear-view mirror
Floor	Anti-attribution floor leather Front windows sun visor Digital Clock One Wheelchair area (OKU) Manual folding ramp for wheelchair at middle door Colorful middle door and rear reverse camera 3pcs LED destination board (front, left, rear) Six-camera CCTV system 10pcs stop buttons for passengers 8pcs safety hammer Stainless steel handrails First aid box China GB standard plug in charger



www.goautovan.my



Go Auto Van

GO AUTO